




EOLO TR

Highly Compressible Flame Retardant PVC Duct Hose

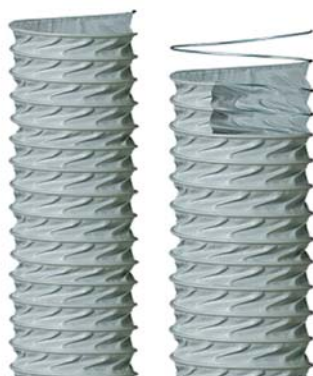

APPLICATIONS

Ideal for suction of fumes, vapours, powders and gasses in civil and naval conditioning plants for ventilation systems.

CONSTRUCTION

PVC coated polyester fabric reinforced by steel helix welded between two layers.

SIZES

1.57" - 16" (40mm-406mm)

TEMPERATURE RANGE

-4°F to 212°F (248°F short time)
-20°C to 100°C (120°C short time)

FEATURES

- Flexible
- Axial compressibility 8:1
- Flame retardant to UL 94 and M2 grade according to NFP 92 503

COLOURS

Grey

REMARKS

- Other sizes and diameters available on request




Code No.	I.D Ø		Bend Radius		Volume (m ³)	Compress. Ratio (x:1)	Vacuum		Approx. Weight		Standard Length	
	(inch)	(mm)	(inch)	(mm)			(psi)	(bar)	(lbs/ft)	(kg/m)	(ft)	(m)
EOLOTR-0040-0010	1.57	40.00	0.79	20.00	0.002	8:1	N/A	N/A	0.07	0.11	33.00	10.00
EOLOTR-0051-0010	2.01	51.00	1.02	26.00	0.003	8:1	N/A	N/A	0.09	0.14	33.00	10.00
EOLOTR-0060-0010	2.36	60.00	1.18	30.00	0.004	8:1	N/A	N/A	0.11	0.16	33.00	10.00
EOLOTR-0063-0010	2.48	63.00	1.26	32.00	0.005	8:1	N/A	N/A	0.11	0.17	33.00	10.00
EOLOTR-0070-0010	2.76	70.00	1.38	35.00	0.006	8:1	N/A	N/A	0.13	0.19	33.00	10.00
EOLOTR-0076-0010	2.99	76.00	1.50	38.00	0.006	8:1	N/A	N/A	0.13	0.20	33.00	10.00
EOLOTR-0080-0010	3.15	80.00	1.57	40.00	0.007	8:1	N/A	N/A	0.14	0.21	33.00	10.00
EOLOTR-0090-0010	3.54	90.00	1.77	45.00	0.009	8:1	N/A	N/A	0.16	0.24	33.00	10.00
EOLOTR-0102-0010	4.02	102.00	2.01	51.00	0.011	8:1	N/A	N/A	0.19	0.28	33.00	10.00
EOLOTR-0110-0010	4.33	110.00	2.17	55.00	0.013	8:1	N/A	N/A	0.20	0.30	33.00	10.00
EOLOTR-0115-0010	4.53	115.00	2.28	58.00	0.014	8:1	N/A	N/A	0.22	0.32	33.00	10.00
EOLOTR-0120-0010	4.72	120.00	2.36	60.00	0.016	8:1	N/A	N/A	0.22	0.33	33.00	10.00
EOLOTR-0127-0010	5.00	127.00	2.52	64.00	0.017	8:1	N/A	N/A	0.24	0.35	33.00	10.00
EOLOTR-0130-0010	5.12	130.00	2.76	70.00	0.018	8:1	N/A	N/A	0.24	0.36	33.00	10.00
EOLOTR-0140-0010	5.51	140.00	2.99	76.00	0.021	8:1	N/A	N/A	0.26	0.38	33.00	10.00
EOLOTR-0152-0010	5.98	152.00	3.15	80.00	0.025	8:1	N/A	N/A	0.28	0.41	33.00	10.00
EOLOTR-0160-0010	6.30	160.00	3.54	90.00	0.028	8:1	N/A	N/A	0.29	0.43	33.00	10.00
EOLOTR-0180-0010	7.09	180.00	4.02	102.00	0.035	8:1	N/A	N/A	0.32	0.48	33.00	10.00
EOLOTR-0203-0010	7.99	203.00	4.49	114.00	0.044	8:1	N/A	N/A	0.36	0.54	33.00	10.00
EOLOTR-0228-0010	8.98	228.00	5.00	127.00	0.055	8:1	N/A	N/A	0.40	0.60	33.00	10.00
EOLOTR-0254-0010	10.00	254.00	5.51	140.00	0.068	8:1	N/A	N/A	0.57	0.85	33.00	10.00
EOLOTR-0279-0010	10.98	279.00	6.02	153.00	0.082	8:1	N/A	N/A	0.62	0.93	33.00	10.00
EOLOTR-0305-0010	12.01	305.00	6.22	158.00	0.098	8:1	N/A	N/A	0.68	1.01	33.00	10.00
EOLOTR-0315-0010	12.40	315.00	6.50	165.00	0.104	8:1	N/A	N/A	0.70	1.045	33.00	10.00
EOLOTR-0330-0010	12.99	330.00	7.01	178.00	0.114	8:1	N/A	N/A	0.73	1.090	33.00	10.00

Cont..



EOLO TR

Highly Compressible Flame Retardant PVC Duct Hose

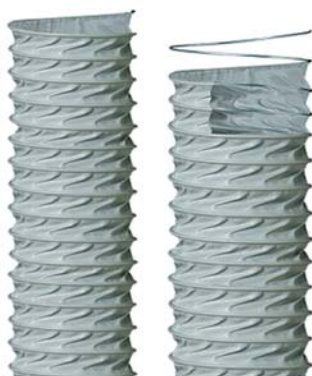

APPLICATIONS

Ideal for suction of fumes, vapours, powders and gasses in civil and naval conditioning plants for ventilation systems.

CONSTRUCTION

PVC coated polyester fabric reinforced by steel helix welded between two layers.

SIZES

1.57" - 16" (40mm-406mm)

TEMPERATURE RANGE

-4°F to 212°F (248°F short time)
-20°C to 100°C (120°C short time)

FEATURES

- Flexible
- Axial compressibility 8:1
- Flame retardant to UL 94 and M2 grade according to NFP 92 503

COLOURS

Grey

REMARKS

- Other sizes and diameters available on request
- Stock item



Code No.	I.D Ø		Bend Radius		Volume	Compress. Ratio	Vacuum		Approx. Weight		Standard Length	
	(inch)	(mm)	(inch)	(mm)	(m3)	(x:1)	(psi)	(bar)	(lbs/ft)	(kg/m)	(ft)	(m)
EOLOTR-0356-0010	14.02	356.00	7.01	178.00	0.132	8:1	N/A	N/A	0.79	1.18	33.00	10.00
EOLOTR-0406-0010	15.98	406.00	7.99	203.00	0.171	8:1	N/A	N/A	0.90	1.34	33.00	10.00

ACCESSORIES



Bridge Clamps



Wormdrive Clamps



Quick Release Clamps



Eyelet Clamps



Heavy Duty Clamps

Sold in standard length only. Other diameters and lengths available on request, please contact our sales office for pricing and minimums. Values indicated here are approximate figures based on 2' straight lengths of hose at 20 °C. Data subject to change without notice. The proper use and maintenance of hoses is the sole responsibility of the purchaser and ultimate user of the product.