



CWC-W



APPLICATIONS

Ideal for dust control and materials. Suitable for: Air Duct Cleaning, Bridge Cleaning Filtering, Flame Retardant, Furnace Duct Cleaning, Sand Blasting, Tractor Pull Exhaust.

CONSTRUCTION

Double plies black neoprene coated polyester fabric hose reinforced with a spring steel wire helix and yellow external PVC coated polyester wearstrip.

SIZES

4" - 24" (101.6mm — 610mm)

TEMPERATURE RANGE

-40°F to 250°F (-40°C to 121°C)



External Wearstrip Neoprene Coated Hose

FEATURES

- Wearstrip offers additional external abrasion and drag resistance
- Good crush resistance and tensile strength
- Neoprene coating offers excellent abrasion and chemical resistance
- Listed as UL 94V-0 flame retardant

COLOURS


Black with yellow wearstrip

REMARKS

- Metric sizes available on request
- Additional coatings available for better abrasion and/or chemical resistance
- Maximum manufactured diameter=12", consult sales team for pricing and minimums on larger sizes

Code No.	I.D Ø		Bend Radius		Comp. Ratio	Working Pressure		Negative Pressure		Approx. Weight		Standard Length	
	(inch)	(mm)	(inch)	(mm)		(psi)	(bar)	(psi)	(bar)	(lbs/ft)	(kg/m)	(ft)	(m)
CWCW-0400-25	4	101.6	3.60	91.44	4:1	30.00	2.07	14.24	0.98	0.54	0.80	25	7.6
CWCW-0500-25	5	127	3.60	91.44	4:1	20.00	1.38	5.89	0.41	0.56	0.83	25	7.6
CWCW-0600-25	6	152.4	3.90	99.06	4:1	15.00	1.03	8.35	0.58	0.86	1.28	25	7.6
CWCW-0700-25	7	177.8	5.75	146.05	4:1	13.00	0.90	4.91	0.34	1.10	1.64	25	7.6
CWCW-0800-25	8	203.2	7.10	180.34	4:1	11.00	0.76	3.59	0.25	1.31	1.95	25	7.6
CWCW-1000-25	10	254	8.40	213.36	4:1	9.00	0.62	1.96	0.14	1.79	2.66	25	7.6
CWCW-1200-25	12	304.8	9.80	248.92	4:1	7.00	0.48	2.41	0.17	2.50	3.72	25	7.6
CWCW-1400-25	14	355.6	11.50	292.10	4:1	6.00	0.41	1.52	0.10	2.90	4.32	25	7.6
CWCW-1600-25	16	406.4	13.00	330.20	4:1	5.00	0.34	1.03	0.07	3.30	4.91	25	7.6
CWCW-1800-25	18	457.2	14.50	368.30	4:1	4.00	0.28	0.74	0.05	3.70	5.51	25	7.6
CWCW-2000-25	20	508	16.30	414.02	4:1	3.00	0.21	0.54	0.04	4.10	6.10	25	7.6
CWCW-2400-25	24	609.6	20.00	508.00	4:1	2.00	0.14	0.29	0.02	4.90	7.29	25	7.6

ACCESSORIES

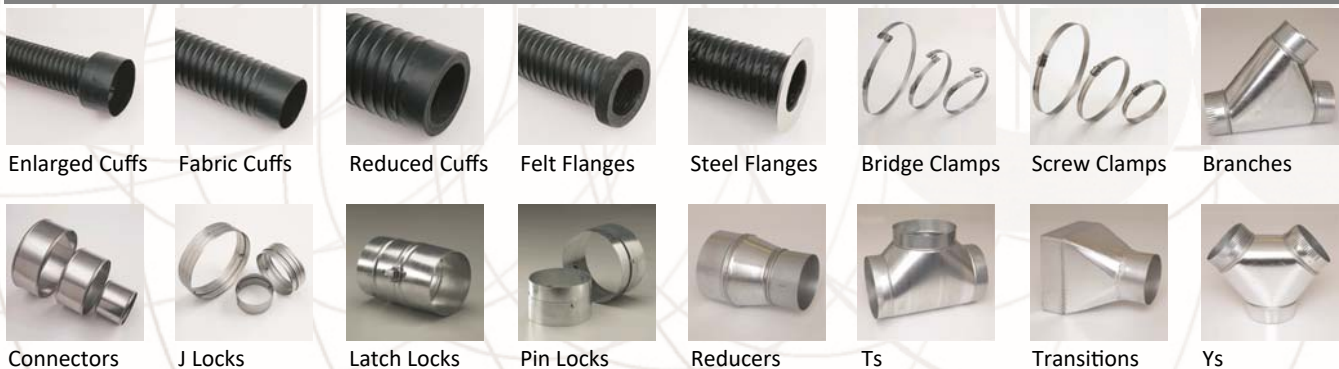

Enlarged Cuffs

Fabric Cuffs

Reduced Cuffs

Felt Flanges

Steel Flanges

Bridge Clamps

Screw Clamps

Branches

Connectors

J Locks

Latch Locks

Pin Locks

Reducers

Ts

Transitions

Ys

Other diameters and lengths available on request, please contact our sales office for pricing and minimums. Values indicated here are approximate figures based on 2' straight lengths of hose at 20 °C. Data subject to change without notice. The proper use and maintenance of hoses is the sole responsibility of the purchaser and ultimate user of the product.