




NETTUNO PU FF

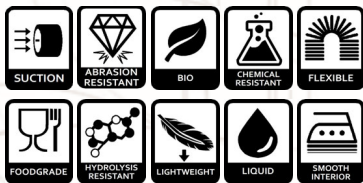

APPLICATIONS

Suitable for suction and delivery of light abrasive food products such as; flour, light grains, freeze dried food stuffs, juices, vinegar, wines, liquor with an alcohol content of up to 20%.

CONSTRUCTION

Plasticized vinilic compound, polyurethane liner and food grade plastic spiral.

SIZES

1.18"-4" (30mm-102mm)

TEMPERATURE RANGE

14°F +140°F (-10°C + 60°C)

FEATURES

- Light and flexible with ETHER PU wall
- Smooth interior for optimal flow
- Phthalates free

Foodgrade PU/PVC Suction Hose

- Chemical and weather resistant
- Does not impart taste or colours to conveying products
- Hydrolysis resistant
- Food grade outer wear strip
- Wear strip provides additional wear and tear resistance
- Food grade according to EU Regulation n° 10/2011 (classes A, B, C and dry food)

COLOURS

Transparent with eternal ivory plastic spiral

REMARKS

- Other sizes and diameters available on request
- Antistatic version available upon request

Code No.	I.D Ø		Min. Wall Thickness		Max. Wall Thickness		Bend Radius		Vol.	Vacuum		Working Pressure		Burst Pressure		Appx. Wt	Std. Lt
	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(inch)	(mm)	(m ³)	(psi)	(bar)	(psi)	(bar)	(psi)	(bar)	(kg/m)	(m)
NTNPU-0030-0030	1.18	30.0	0.11	2.8	0.13	3.3	5.91	150.0	0.09	9.95	0.69	72.52	5	217.56	15	0.36	30
NTNPU-0032-0030	1.25	31.8	0.11	2.9	0.13	3.4	6.10	155.0	0.10	9.95	0.69	72.52	5	217.56	15	0.39	30
NTNPU-0035-0030	1.38	35.0	0.12	3.0	0.14	3.5	6.69	170.0	0.11	9.95	0.69	72.52	5	217.56	15	0.44	30
NTNPU-0038-0030	1.50	38.1	0.12	3.1	0.15	3.7	7.28	185.0	0.12	9.95	0.69	72.52	5	217.56	15	0.52	30
NTNPU-0040-0030	1.57	40.0	0.12	3.1	0.15	3.8	7.68	195.0	0.13	9.95	0.69	72.52	5	217.56	15	0.55	30
NTNPU-0045-0030	1.77	45.0	0.12	3.1	0.16	4.1	8.46	215.0	0.16	9.95	0.69	72.52	5	217.56	15	0.67	30
NTNPU-0050-0030	1.97	50.0	0.13	3.3	0.18	4.5	9.25	235.0	0.20	9.95	0.69	72.52	5	217.56	15	0.80	30
NTNPU-0051-0030	2.00	50.8	0.13	3.3	0.18	4.5	9.25	235.0	0.20	9.95	0.69	72.52	5	217.56	15	0.81	30
NTNPU-0060-0030	2.36	60.0	0.13	3.4	0.18	4.6	10.83	275.0	0.25	9.95	0.69	72.52	5	217.56	15	0.97	30
NTNPU-0063-0030	2.50	63.5	0.14	3.5	0.18	4.6	11.42	290.0	0.29	9.95	0.69	72.52	5	217.56	15	1.04	30
NTNPU-0070-0030	2.76	70.0	0.15	3.7	0.19	4.9	12.60	320.0	0.43	9.95	0.69	72.52	5	217.56	15	1.20	30
NTNPU-0076-0030	3.00	76.2	0.15	3.9	0.20	5.2	13.39	340.0	0.48	9.95	0.69	72.52	5	217.56	15	1.38	30
NTNPU-0080-0030	3.15	80.0	0.16	4.1	0.22	5.5	14.37	365.0	0.52	9.95	0.69	58.02	4	174.05	12	1.55	30
NTNPU-0090-0030	3.54	90.0	0.17	4.4	0.23	5.8	16.54	420.0	0.60	9.95	0.69	58.02	4	174.05	12	1.85	30
NTNPU-0100-0030	3.94	100.0	0.19	4.7	0.25	6.3	18.50	470.0	0.72	9.95	0.69	58.02	4	174.05	12	2.20	30
NTNPU-0102-0030	4.02	102.0	0.19	4.7	0.25	6.3	18.50	470.0	0.73	9.95	0.69	58.02	4	174.05	12	2.25	30

ACCESSORIES



Din Safety
Clamp




Camlocks



Male Ends



Flange Ends



Tri Clamps
Fittings



SMS Fittings



Din Fittings



RJT Fittings

Cont..



NETTUNO PU FF

Foodgrade PU/PVC Suction Hose



APPLICATIONS

Suitable for suction and delivery of light abrasive food products such as; flour, light grains, freeze dried food stuffs, juices, vinegar, wines, liquor with an alcohol content of up to 20%.

CONSTRUCTION

Plasticized vinilic compound, polyurethane liner and food grade plastic spiral.

SIZES

1.18"-4" (30mm-102mm)

TEMPERATURE RANGE

14°F +140°F (-10°C + 60°C)

FEATURES

- Light and flexible with ETHER PU wall
- Smooth interior for optimal flow
- Phthalates free


- Chemical and weather resistant
- Does not impart taste or colours to conveying products
- Hydrolysis resistant
- Food grade outer wear strip
- Wear strip provides additional wear and tear resistance
- Food grade according to EU Regulation n° 10/2011 (classes A, B, C and dry food)

COLOURS

Transparent with eternal ivory plastic spiral

REMARKS

- Other sizes and diameters available on request
- Antistatic version available upon request

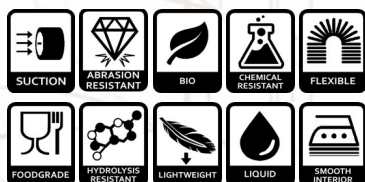

ACCESSORIES



Wormdrive
Clips



Heavy Duty
Clamps



Double Bolt
Clamps

Other diameters and lengths available on request, please contact our sales office for pricing and minimums. Values indicated here are approximate figures based on 2' straight lengths of hose at 20 °C. Data subject to change without notice. The proper use and maintenance of hoses is the sole responsibility of the purchaser and ultimate user of the product.