

IPL **VULCANO PU 04 ETERE**

Since 1975

New!




Transparent ether based TPU hose, reinforced with a high adhesion TPU coated zinc plated steel spiral.

The wall material is permanent antistatic ($R < 10^9$ Ohm/m). Constant wall thickness of 0,40 mm throughout the range. Excellent resistance to abrasion and flexion as well as to Hydrolysis and microbes. Axially compressible (5:1) Foodgrade UE 10/2011(classes A, B, C, D2, E) and FDA CFR 21-Item 177.2600. Suitable for conveying fatty food

- **Food industry:** light suction and delivery of abrasive powders, flours and dry food

COD.VE

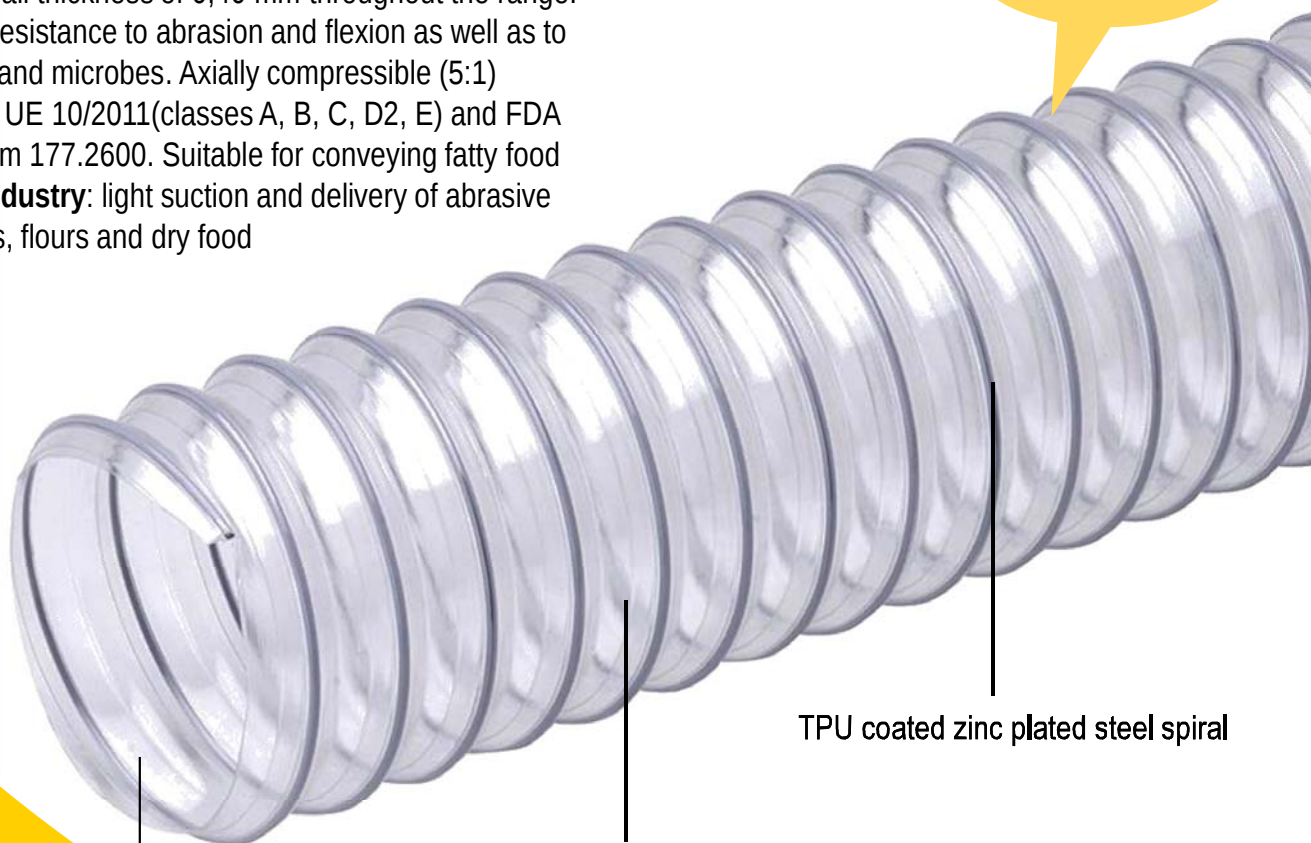

TPU coated zinc plated steel spiral

Ether based TPU wall,
permanent antistatic ($R < 10^9$ Ohm/m)

Clear sidewall for an easier visual detection



**IPL**

Since 1975

VULCANO PU 04 ETERE**Scheda tecnica/Technical data**

Codice/Part number	Int. ø	Spessore min Min wall thick	Spessore max Max wall thick	Peso/ Weight	Depr./ Vacuum	Curvatura/ Bending	Lg rotolo/ Coil Length	Volume
	[mm]	[mm]	[mm]	[g/m]	[m H ₂ O]	[mm]	[m]	[m ³]
VE 01 025.0 000.0	25*	0,40	1,80	130	0,40	25	20	0,05
VE 01 030.0 000.0	30*	0,40	1,80	150	0,40	25	20	0,07
VE 01 032.0 000.0	32*	0,40	1,80	160	0,40	25	20	0,07
VE 01 038.0 000.0	38*	0,40	1,80	185	0,40	30	20	0,08
VE 01 040.0 000.0	40*	0,40	1,80	195	0,40	32	20	0,09
VE 01 045.0 000.0	45*	0,40	1,80	215	0,40	36	20	0,14
VE 01 051.0 000.0	51	0,40	1,80	200	0,40	40	20	0,15
VE 01 060.0 000.0	60	0,40	1,80	230	0,40	50	20	0,17
VE 01 063.0 000.0	63	0,40	1,80	245	0,40	55	20	0,18
VE 01 065.0 000.0	65*	0,40	1,80	250	0,40	56	20	0,19
VE 01 070.0 000.0	70	0,40	2,10	295	0,40	60	20	0,20
VE 01 076.0 000.0	76	0,40	2,10	315	0,40	65	20	0,22
VE 01 080.0 000.0	80	0,40	2,10	330	0,40	65	20	0,23
VE 01 090.0 000.0	90	0,40	2,10	370	0,40	75	20	0,25
VE 01 102.0 000.0	102	0,40	2,10	415	0,30	85	15	0,32
VE 01 110.0 000.0	110	0,40	2,10	450	0,30	90	15	0,34
VE 01 115.0 000.0	115*	0,40	2,10	470	0,30	95	15	0,35
VE 01 120.0 000.0	120	0,40	2,10	485	0,25	100	15	0,55
VE 01 127.0 000.0	127	0,40	2,30	590	0,25	105	15	0,58
VE 01 130.0 000.0	130	0,40	2,30	600	0,20	105	15	0,60
VE 01 140.0 000.0	140	0,40	2,30	645	0,20	115	15	0,64
VE 01 152.0 000.0	152	0,40	2,30	700	0,20	125	15	0,69
VE 01 160.0 000.0	160	0,40	2,60	865	0,15	130	15	0,86
VE 01 180.0 000.0	180	0,40	2,60	970	0,15	150	15	0,96
VE 01 203.0 000.0	203	0,40	2,60	1095	0,10	165	15	1,09
VE 01 220.0 000.0	220*	0,40	2,60	1180	0,10	185	10	1,17
VE 01 228.0 000.0	228*	0,40	2,60	1225	0,10	185	10	1,21
VE 01 254.0 000.0	254	0,40	2,60	1360	0,10	210	10	1,35
VE 01 279.0 000.0	279*	0,40	2,60	1490	0,08	230	10	1,47
VE 01 305.0 000.0	305	0,40	2,60	1630	0,08	250	10	1,61
VE 01 315.0 000.0	315*	0,40	2,60	1685	0,07	275	10	1,66
VE 01 356.0 000.0	356*	0,40	2,60	1900	0,07	300	10	0,295
VE 01 406.0 000.0	406*	0,40	2,60	2160	0,06	350	10	0,381

*Su richiesta, per quantità da definire con l'ufficio vendite/

Available on request, contact our sales office for more info and quantities