


R4P

High Temperature Radiator, Black, 150 PSI

4	102	4.59	116.5	10	150	2.31	3.45
4-1/8	105	4.74	120.5	10	150	3.02	4.51
4-1/2	114	5.06	128.5	10	150	2.57	3.83
5	127	5.57	141.5	10	150	2.90	4.33
5-1/2	140	6.06	154	10	150	3.08	4.59
6-5/8	168	7.17	182	10	150	3.62	5.41

R4P SL

Flexible Corrugated Radiator Hose, Black, 150 PSI

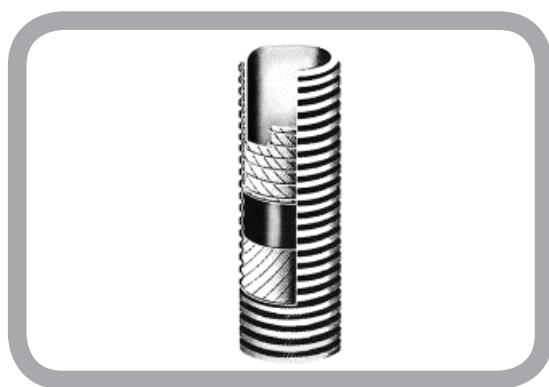

APPLICATIONS

- Mandrel built hardwall rubber hose designed for transporting of hot water and anti-freeze liquids in cooling systems of cars and industrial vehicles' engines.

TUBE

- Smooth black heat resistant synthetic rubber.

REINFORCEMENT

- High strength synthetic cord plies and fully embedded helix wire.

COVER

- Corrugated, heat, oil and ageing resistant synthetic rubber.

COLOUR

- Black

TEMPERATURE RANGE

- -40°C (-40°F) to +100°C (+212°F)

WORKING PRESSURE

- 150 PSI / 10 BAR

SAFETY FACTOR

- 3:1

I.D Ø		O.D Ø		Working Pressure		BR	Vacuum	Weight	
inch	mm	inch	mm	bar	psi	Mm	bar	lbs/ft	kg/m
1	25	1.38	35	10	150	63	0.9	0.46	0.68
1-1/4	32	1.65	42	10	150	80	0.9	0.55	0.82
1-3/8	35	1.89	48	10	150	88	0.9	0.74	1.10
1-1/2	38	2.00	51	10	150	95	0.9	0.72	1.07
1-3/4	45	2.17	55	10	150	113	0.9	0.76	1.14
2	51	2.40	61	10	150	128	0.9	0.96	1.20
2-3/8	60	2.83	72	10	150	150	0.9	1.17	1.74
2-1/2	63.5	2.95	75	10	150	160	0.9	1.18	1.76
2-3/4	70	3.23	82	10	150	175	0.9	1.28	1.91
3	76	3.46	88	10	150	190	0.9	1.39	2.08
3-1/2	90	4.09	104	10	150	225	0.9	1.94	2.89
4	102	4.57	116	10	150	255	0.9	2.08	3.10
4-1/2	114	5.12	130	10	150	285	0.9	2.99	4.46
5	125	5.57	141	10	150	315	0.9	3.26	4.86
6	150	6.61	168	10	150	375	0.9	4.38	6.54

• Other sizes, length, pressure ratings and colors are available on request